


Specification: **BR-1013**

- * 3/8" diameter press to fit
- * Standard 18" #22 AWG leads
- * Special leads upon request
- * Switch or magnet are available separately
- * Resistor, Diode and Supervisory Loop available on request
- * Build-in Resistors or Diodes on quest
- * Colors: White, Brown, Grey

... Recessed Mounted



Dimension (mm):

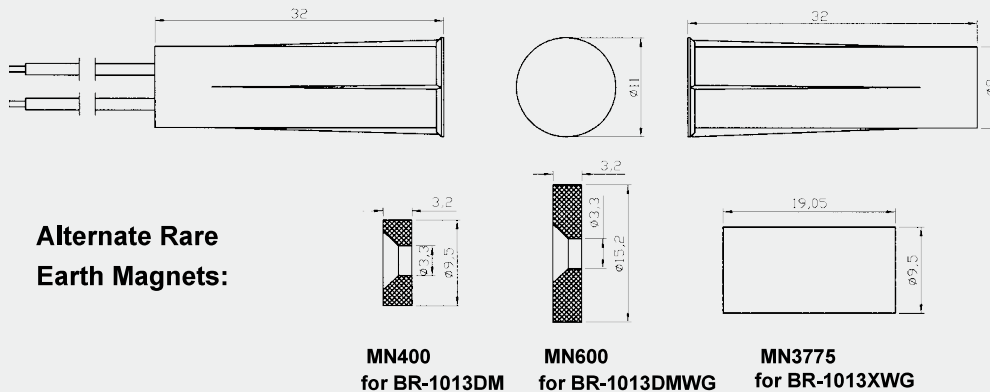

Order Information:

Part Number	Loop Type	Reed Form	Closed Gap [Inch(mm)]	Depature Gap [Inch(mm)] (Ohm)	Maximum Initial Contact Resistance (W)	Maximum Contact Rating (VDC/VAC)	Maximum Switching Voltage (A)	Maximum Switching Current
BR-1013	Closed	N/O	1 (25)	1.1 (28)	0.150	10	100	0.5
BR-1013XWG	Closed	N/O	1 ¹ / ₄ (37)	1.81 (46)	0.150	10	100	0.5
BR-1013DM	Closed	N/O	³ / ₄ (19)	0.87 (22)	0.150	10	100	0.5
BR-1013DMWG	Closed	N/O	1 ¹ / ₄ (31)	1.3 (33)	0.150	10	100	0.5
BR-1013A	Open	N/C	¹ / ₈ (22)		0.150	3	30	0.2
BR-1013C	Closed&Open	SPDT	¹ / ₈ (22)		0.150	3	30	0.2
BR-1013DMA	Open	N/C	⁵ / ₈ (15)		0.150	3	30	0.2
BR-1013DMC	Closed&Open	SPDT	⁵ / ₈ (15)		0.150	3	30	0.2
BR-1013DMWGA	Open	N/C	1 (25)		0.150	3	30	0.2
BR-1013DMWGC	Closed&Open	SPDT	1 (25)		0.150	3	30	0.2

* BR-1013XWG magnetic contact switches shall be installed so that a door or other movable opening cannot be opened more than 2 inches (51mm) without initiating an alarm. Switches exceeding 2 inches can not be installed per UL681-the Standard for installation and Classification of Burglar and Holdup Alarm